

Richmond Auburn Richmond Bordeaux

Cabinet Specifications

Face Frames (1)

Face Frames are $\frac{3}{4}$ * 1 $\frac{1}{2}$ Solid hardwood , Frames are mortise and tenons construction reinforced with glue and nails.Frames are dadoed to received cabinet ends,top, and bottoms.

Tops & Bottoms (2)

Tops and bottom panels are $\frac{1}{2}$ " thick multi-ply hardwood plywood . Tops and bottoms are dadoed into the face frame and end panels. Base bottom panels are $\frac{3}{8}$ thick.

Toe Kicks 3

Toe kicks shall be 1/2" thick hardwood plywood .

(4) End Panels

2

End panels are $\frac{1}{2}$ "thick mutli-ply hardwood plywood. All end panels are dadoed into the face frame and recessed $\frac{3}{16}$.

9

S Adjustable Shelves

Adjustable shelves are $\frac{5}{8}$ " thick multi-ply hardwood Plywood. Edge banded with wood tapes. (Exceeds industry standards.)

6 Back Panels

5 + 12 mm thick multi-ply hardwood plywood. Backs are routed, glued and nailed in cabinet. (Exceeds industry standards.)

(7) Shelf Clips

Shelf clips are 6mm bore with a fluted Metal clips. Shelved are adjustable on $2\frac{1}{2}$ increments.

Doors 8

 $\frac{3}{4}$ " Solid Hardwood door styles with straight top veneer raised panels.

Hinges

Hinges Full Overlay, Concealed, 110 degree opening.


Drawer Boxes


- $\frac{5}{8}$ solid hardwood front, back and 2 sides with $\frac{3}{8}$ plywood drawer bottoms, Dovetail construction. .(Exceeds industry standards.)
- Drawer Glides
- Epoxy coated ,Under mount Glides . . (Exceeds industry standards.)

Base Corner Brackets (12) High impact, injection molded plastic .

Hanging Strips (13)

Hanging strip are $\frac{3}{4}$ * $1\frac{1}{4}$ hardwood.

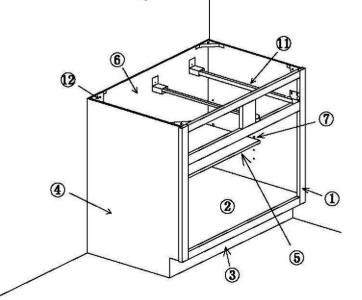



www.ghicabinets.com